

# PSD series power supply

Desktop type power supply 52V DC

CODE: **PSD520115 v1.0/III**

**EN**

TYPE: **PSD 52V/1,15A Desktop type power supply for CCTV**

## Features of the power supply:

- power output 1,15 A/52 V DC\*
- universal input voltage range ~100-240 V
- high efficiency 92%
- standby power <0,2 W
- efficiency level: VI
- protections:
  - SCP short-circuit protection
  - overvoltage protection (AC input)
  - overload (OLP)
- warranty – 2 year from the production date




## DESCRIPTION

The power supply is intended for supply cameras that require stabilised voltage of **52 V DC**. The unit has a cable with a DC5.5/2.1 plug. The power supply unit is protected against short-circuit, overload and overvoltage.

## TECHNICAL PARAMETERS

Supply voltage	~100-240 V; 50/60 Hz
Current consumption	1,3-0,8 A
Supply power	60 W max.
Efficiency	92%
Output voltage	52V DC
Output current $t_{AMB} < 30^{\circ}\text{C}$	<b>1,15 A - refer to graph 1.</b>
Output current $t_{AMB} = 40^{\circ}\text{C}$	<b>0,8 A - refer to graph 1.</b>
Ripple voltage	250mV p-p max.
Short-circuit protection SCP	electronic, automatic recovery
Overload protection OLP	150-200% of power supply, automatic recovery
Operation conditions	temperature $-10^{\circ}\text{C} \div 40^{\circ}\text{C}$ relative humidity 20%...90%, without condensation
Dimensions (LxWxH)	113 (128) x 53 x 31 [mm]
Net/gross weight	0,30kg / 0,35kg
Protection class PN-EN 60950-1:2007	II (second)
Lenght of DC cable	1,2m + plug DC5,5/2,1 female
Lenght of AC cable	1,5m + mains plug
Storage temperature	$-20^{\circ}\text{C} \dots +60^{\circ}\text{C}$
Declaration, warranty	CE, 2 year from the production date

\* In order to extend the life of the power supply, the load current of 0,8 A is recommended.

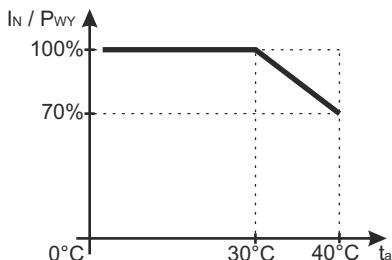

Graph 1.  
Relation between output current and  
ambient temperature (instantaneous load).


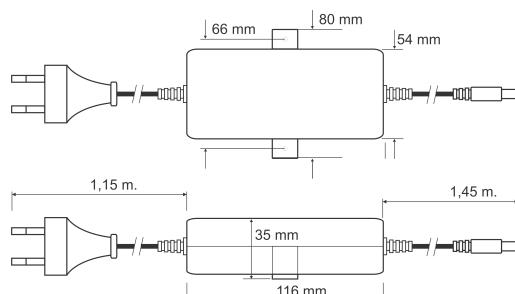


Fig.1. Dimension of power supply.

## ACCESORIES

**ACCESORIES:**  
[1] adapter CABLE - PLUG DC 5,5/2,1 - code ML109

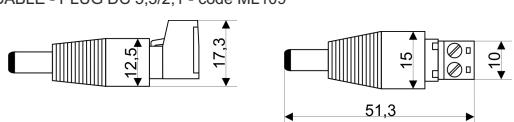

For power supplies are available  
accessories - fuse blocks and cable adapter.  
For details –visit [www.pulsar.pl](http://www.pulsar.pl).

\* Refer to graph 1