


4 IN 1 BULLET CAMERA PRO SERIES 2 MP WITH STARLIGHT TECHNOLOGY

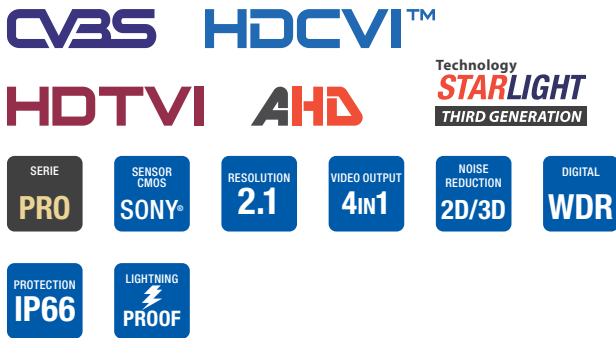

FEATURES

- Full HD resolution with Sony® CMOS sensor
- Improved StarLight technology
- 2,7 ~ 13,5 mm varifocal lens
- Transmission distance up to 300 meters
- AWB, AGC, BLC, HLC, Digital WDR, 2D/3D-DNR, defog
- Slow shutter, Sense Up, digital zoom
- Mirror, motion detection, privacy mask
- OSD menu
- 4 in 1 output (switch via OSD buttons): CVBS, HDCVI, HDTV, AHD
- IP66
- Protection against voltage surges
- 3 AXIS bracket with wiring holes

DOUBLE OUTPUT




ACCESSORIES



HYU-332
Connection base

DIMENSIONS

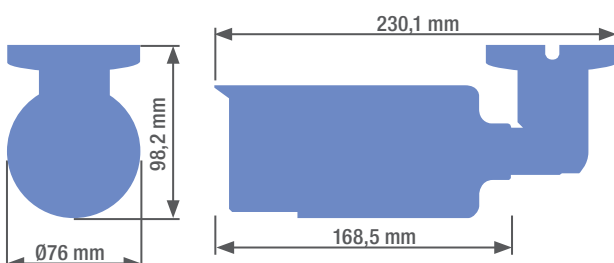

CAMERA

Image sensor	1/2,8 Sony® CMOS 2 MP
Effective pixels	1920(H) x 1080(V)
Frames per second	PAL/NTSC: 25/30 fps @1080P
Electronic shutter	Auto, 1/25s ~ 1/50.000s, FLK, 1 ~ 30X
Minimum illumination	0,001 lux F1,2 (AGC ON)
Video output	AHD, HDCVI, HDTV, 1 BNC CVBS (button switch)

LENS

Lens	2,7 ~ 13,5 mm
Focus mode	Manual

FUNCTIONS

Day/night	Auto (ICR), Color, B/W, Ext
OSD menu	Supported
White balance	AWB, ATW, indoor, outdoor, manual
Gain control	AGC
Backlight compensation	BLC, HLC, Digital WDR
Noise reduction	2D/3D-DNR
Defog	Supported
Mirror	Supported
Motion detection	Supported
Privacy mask	Supported

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC (±10%) /400 mA
Consumption	<5W
Working temperature	-30°C ~ +60°C
RH	<95% HR
Transmission distance	Up to 300 meters (theoretical) via 75-3 coaxial cable
Protection	IP66

PHYSICAL FEATURES

Case	Metal
Dimensions	230,1 x 98,2 x 76 mm