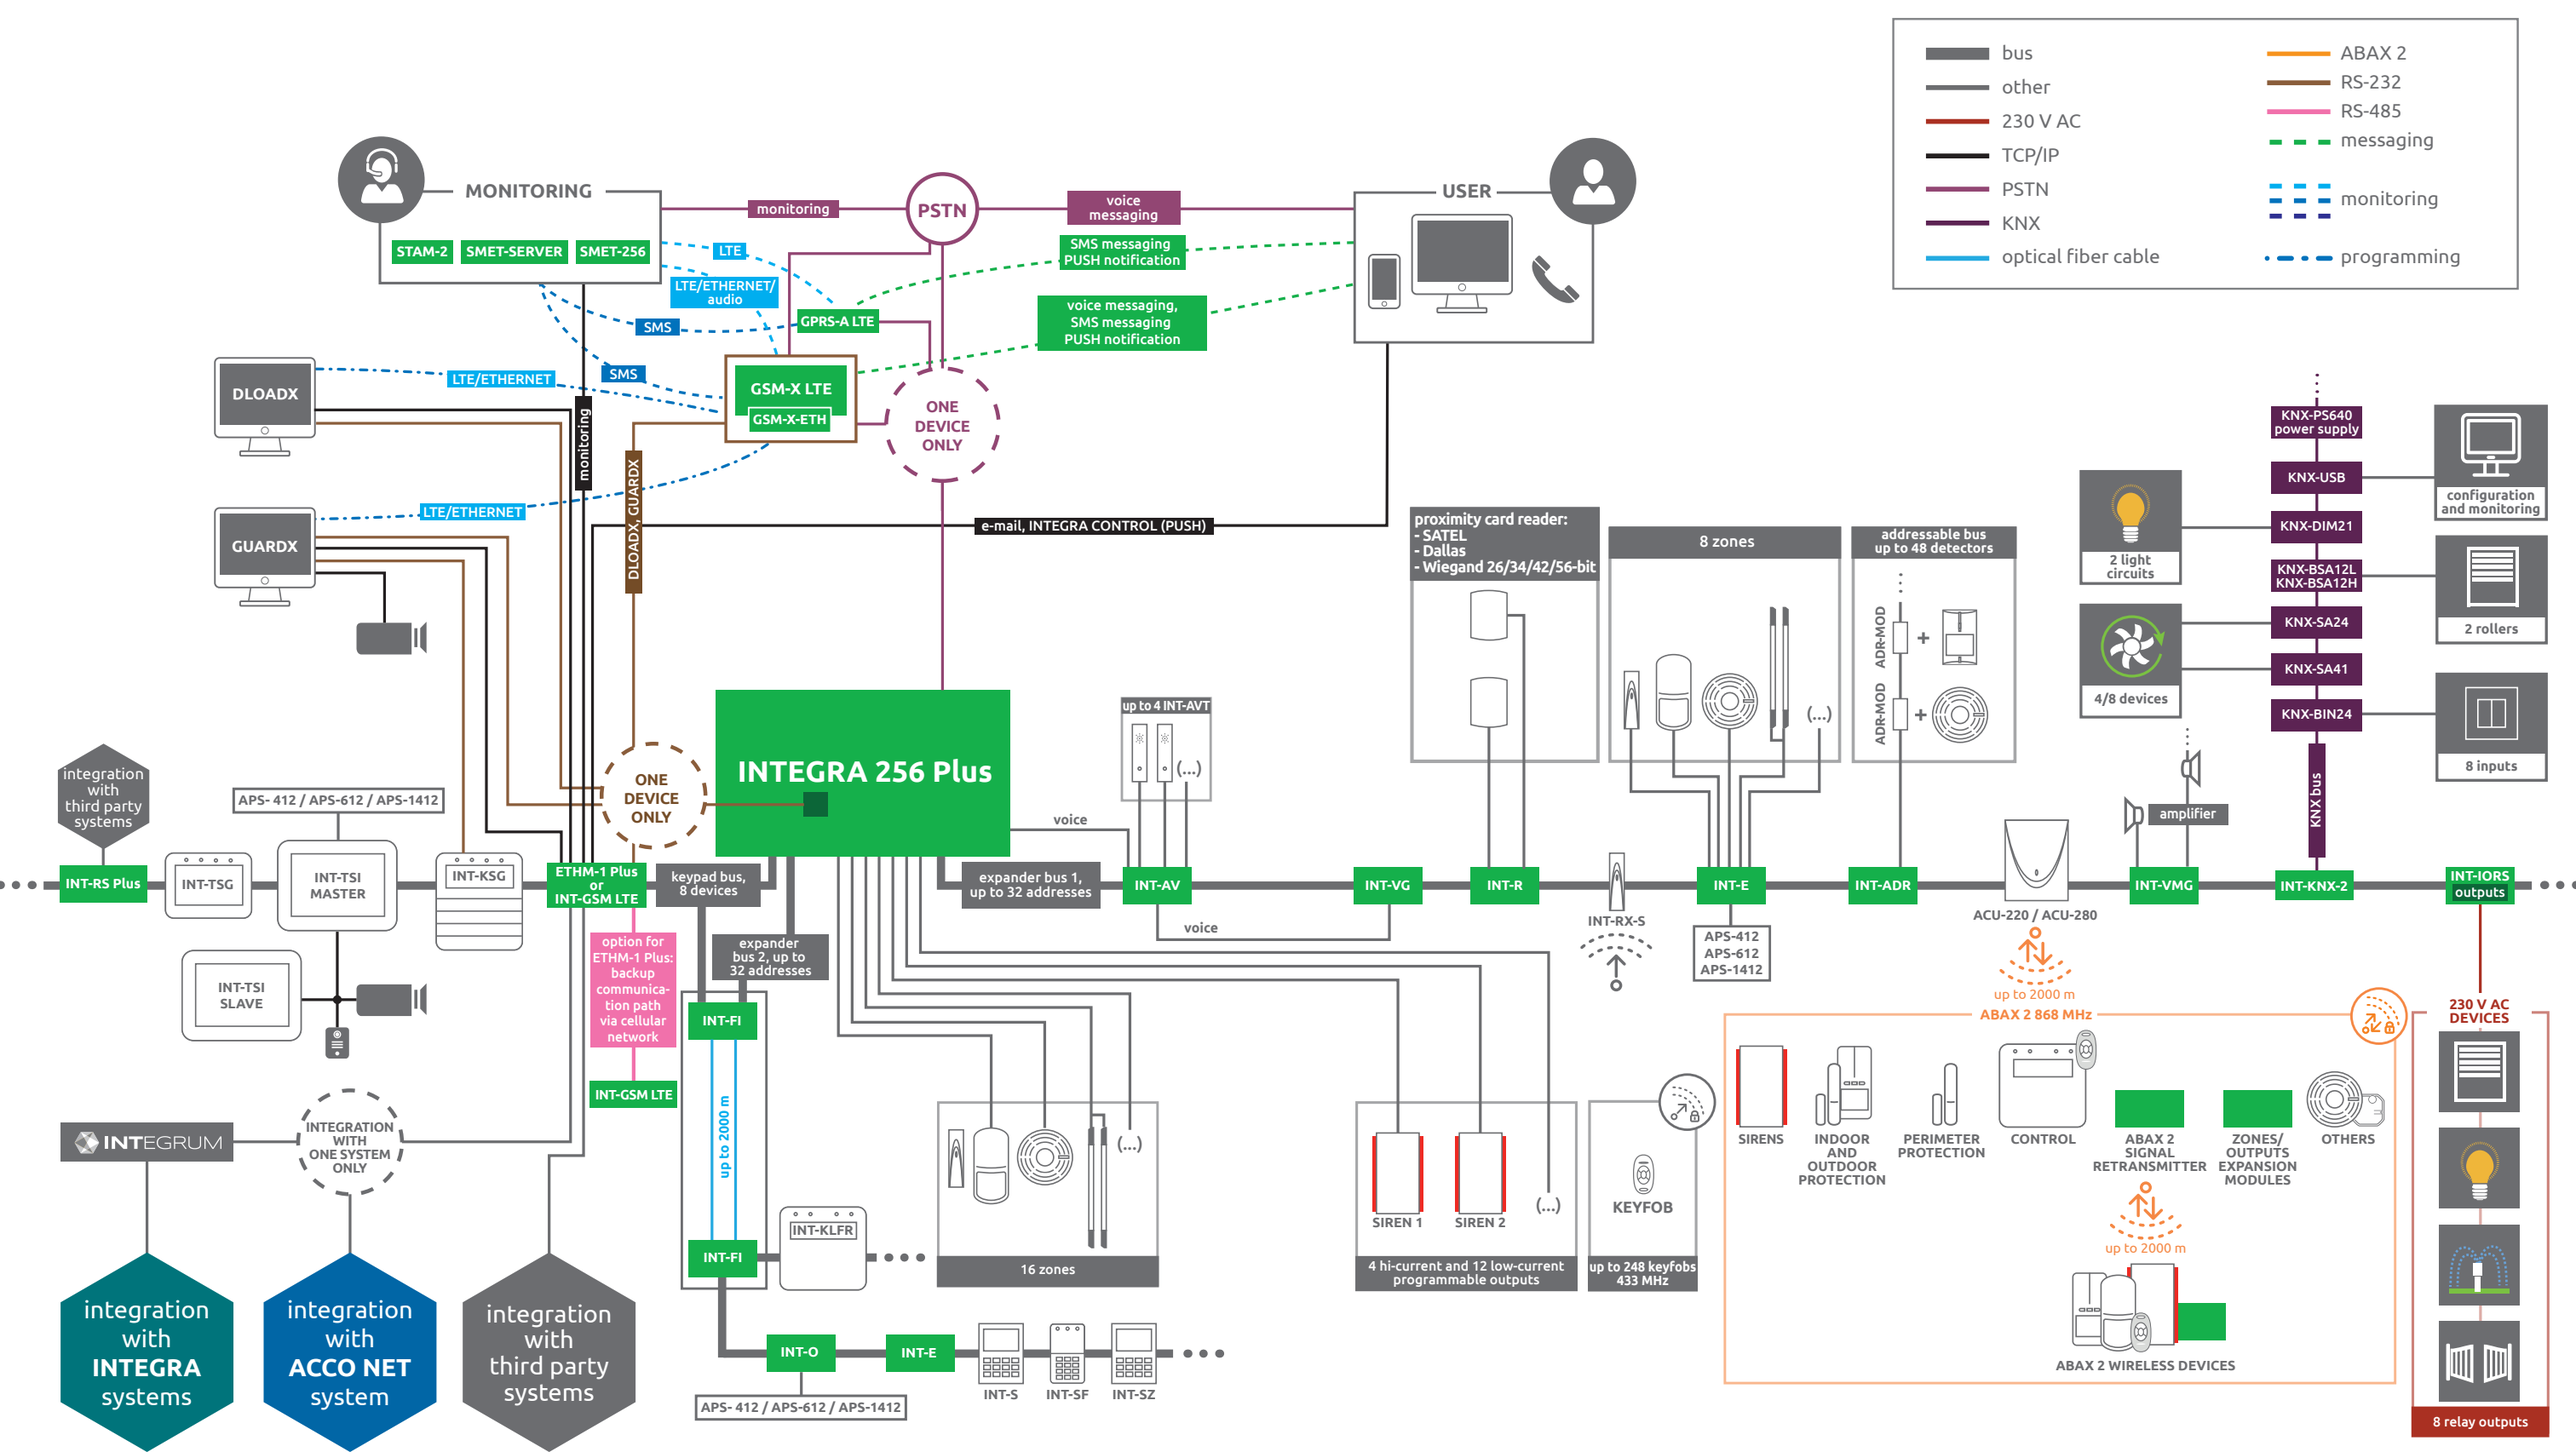
bus
other
230 V AC
TCP/IP
PSTN
KNX
optical fiber cable
ABAX 2
RS-232
RS-485
messaging
monitoring
programming
MONITORING
STAM-2
SMET-SERVER
SMET-256
monitoring
PSTN
voice messaging
SMS messaging PUSH notification
voice messaging, SMS messaging PUSH notification
USER
LTE
LTE/ETHERNET/ audio
SMS
GPRS-A LTE
GSM-X LTE
GSM-X-ETH
ONE DEVICE ONLY
DLOADX
LTE/ETHERNET
SMS
monitoring
DLOADX, GUARDX
GUARDX
LTE/ETHERNET
e-mail, INTEGRA CONTROL (PUSH)
proximity card reader:
- SATEL
- Dallas
- Wiegand 26/34/42/56-bit
8 zones
addressable bus up to 48 detectors
ADR-MOD
ADR-MOD
2 light circuits
4/8 devices
KNX-PS640 power supply
KNX-USB
KNX-DIM21
KNX-BSA12L KNX-BSA12H
KNX-SA24
KNX-SA41
KNX-BIN24
configuration and monitoring
2 rollers
8 inputs
KNX bus
amplifier
integration with third party systems
APS- 412 / APS-612 / APS-1412
ONE DEVICE ONLY
INTEGRA 256 Plus
up to 4 INT-AVT
voice
INT-RS Plus
INT-TSG
INT-TSI MASTER
INT-KSG
ETHM-1 Plus or INT-GSM LTE
keypad bus, 8 devices
expander bus 1, up to 32 addresses
INT-AV
INT-VG
INT-R
INT-RX-S
INT-E
INT-ADR
ACU-220 / ACU-280
INT-VMG
INT-KNX-2
INT-IORS outputs
voice
APS-412 APS-612 APS-1412
INT-TSI SLAVE
option for ETHM-1 Plus: backup communica-tion path via cellular network
INT-GSM LTE
expander bus 2, up to 32 addresses
INT-FI
up to 2000 m
INT-FI
INTEGRUM
INTEGRATION WITH ONE SYSTEM ONLY
INT-KLFR
16 zones
SIREN 1
SIREN 2
4 hi-current and 12 low-current programmable outputs
KEYFOB
up to 248 keyfobs 433 MHz
up to 2000 m
ABAX 2 868 MHz
SIRENS
INDOOR AND OUTDOOR PROTECTION
PERIMETER PROTECTION
CONTROL
ABAX 2 SIGNAL RETRANSMITTER
ZONES/ OUTPUTS EXPANSION MODULES
OTHERS
up to 2000 m
ABAX 2 WIRELESS DEVICES
230 V AC DEVICES
8 relay outputs
INT-O
INT-E
INT-S
INT-SF
INT-SZ
APS- 412 / APS-612 / APS-1412
integration with INTEGRA systems
integration with ACCO NET system
integration with third party systems