


CODE: **AWO200K** v.1.1/II  
 NAME: **Enclosure 17/TRP50/DSPR/L/**  
**two-level**

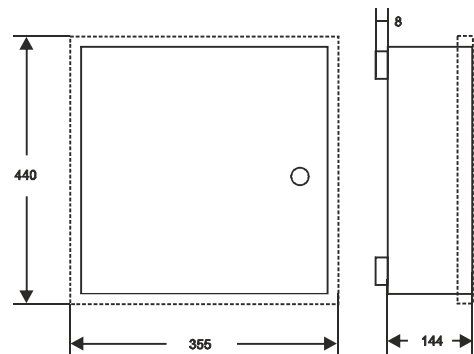

**APPLICATION**

- DSC:** (PC 1616, 1832, 1864, 4020) + 3x 5108 (4108, 5208, 5100, 4116)  
**MODULES:** (PC 5204, 5400, 5200, 5580, 4216, 4204) + 3x (5108, 4108, 5100, 4116, 5208)  
**PARADOX:** (E55, E65, 728ULT, EVO48, EV0192, SP4000, SP5500, SP6000, SP7000) + 2 x Z X 8 (Z X 4, APR3-ADM2, APR3-HUB2, PGM4)  
**RISCO:** PRO24, 116, 128, 140+ RP296EPS+ EZ16 (E04, EZ8)  
**SATEL:** CA4V1, CA5, CA6  
 (VERSA5, 10, 15, CA10) + CA10E (CA64E, SM, MST1)  
 (INTEGRA24, 32) + CA64E (SM)  
**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM-16, SR, PTSA) + CA64E (SM)  
**COMMUNICATION MODULES:** **GORKE** – ATG  
**ROPAM** – BASIC and MULTI GSM  
**SATEL** – ETHM, GSM LT1, LT2, GPRS-T1/T2/T4  
**PYRONIX:** MATRIX 424, 6, 816, 832, 832+  
**TEXECOM:** PREMIER 412, 816, 832, 48, 88, 168, 640  
**TELMOR:** TCA- 824 + TEX800+ TMT1  
**ROGER:** PR402, CPR 32-SE  
**EBS:** PX 202A  
**PULSAR:** MS 1012, MSR 1012, MSRK 1012  
 MS 2012, MSR 2012, MSRK 2012

**TECHNICAL PARAMETERS**

<b>Dimensions:</b>	<b>Inside:</b> W=340, H=425, D=135 <b>external:</b> W1=355, H1=440, D1=144+8mm [mm, +/-2]
<b>Weight net/gross:</b>	6,30kg / 7,0kg [+/-0,1kg]
<b>Space for battery:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	TRP 50VA/16V/18V/20V in enclosure PC/ABS class UL94-V0, IP30
<b>Supply:</b>	230V/AC (-15%/+10%), 50Hz, 250mA (max.)
<b>Power output:</b>	U1=16V/AC or U2=18V/AC or U3=20V/AC(-5%,+15%), I1=3,0A or I2=2,8A or I3=2,5A(max.)
<b>Operating environment:</b>	class II, -10°C+ 40°C
<b>Material description:</b>	sheet metal DC01, 0,7mm thick, rust protection, colour: RAL 9003
<b>Destination:</b>	Indoor
<b>Tamper protection:</b>	1 x microswitch: opening enclosure, 0,5A@50VDC max. NC- normally closed contacts
<b>Closing:</b>	screwed x 2
<b>Notes:</b>	lock assembly possible, distance from the wall (mounting surface) - 8mm
<b>Declaration, warranty:</b>	CE, 2 year from the production date