
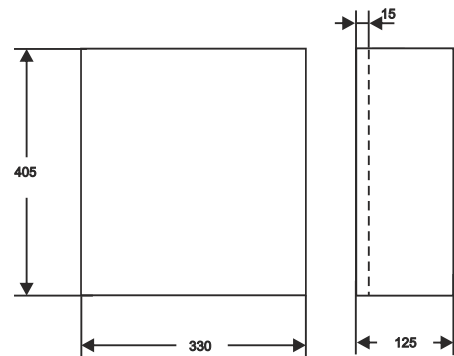


CODE: **AWO269PU** v.1.0/I
 NAME: **Casing 17/80/SATEL/PUSTA/G3**

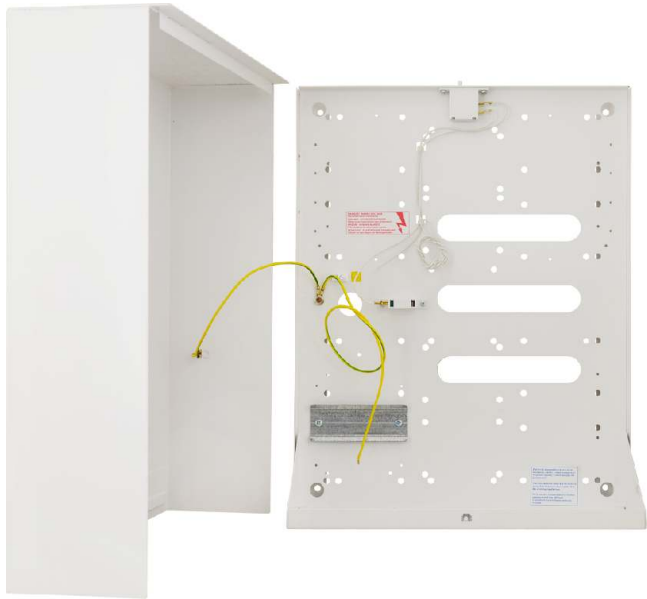

DESTINATION

SATEL:


Panels and modules which can be mounted in the casing

The upper part of the housing

- 1) INT-E x 6pcs. max
- 2) INT-PP x 3pcs. max
- 3) INT-IORS / INT-ORS x 2pcs. max
(After using the AWO269S din rail kit)

The lower part of the housing

- 1) INT-E x 6pcs. max
- 2) INT-PP x 3pcs.
- 3) INT-IORS / INT-ORS x 2pcs. max
(After using the AWO269S din rail kit)
- 4) Transformer and battery 7Ah / 17Ah
- 5) Power supply units APS412 and battery 7Ah / 17Ah

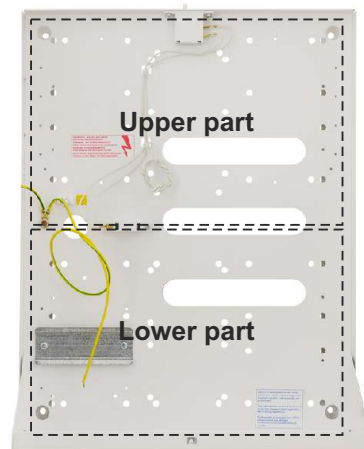

TECHNICAL DATA

Dimensions:	internal: W=315, H=395, D=100 external: W1=330, H1=405, D1=125 [mm, +/-2]
Weight net/gross:	4,00kg / 4,20kg [+/-0,1kg]
Battery space:	17Ah/12V Sealed Lead Acid (SLA)
Transformer:	No
Operating conditions:	II environmental class, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	2 x microswitch: opening and detachment of the enclosure, 0,5A@50V/DC max. NC/NO- normally closed/normally open
Closing:	screwed: screw, at the front
Notes:	distance from the wall (mounting surface) – 15mm, "C"- shaped doors and the bottom of the casing, no hinges
Declaration, warrant	CE, Construction: CLC/TS 50131-1 Grade 3, warranty – 2 year from the production date