

IP BULLET CAMERA, 4 MP WITH POE

RESOLUTION
4.0

AUTO
FOCUS

IR
ILLUMINATION
40M

NOISE
REDUCTION
2D/3D

Real WDR
WDR

LIGHTNING
PROOF

PROTECTION
IP66

Supported
PoE

Onvif



FEATURES


- 4MP resolution with CMOS sensor
- H.264 and H.265
- IR illumination up to 40 meters
- 2,7 ~ 13,5 mm autofocus motorized lens
- OSD menu
- AWB, AGC, BLC, WDR digital, 2D/3D-DNR
- Slow shutter, Smart IR, Sense Up
- Mirror, motion detection, privacy mask
- Integration with other brands via Onvif 2.4, SDK and RTSP
- Compatible with ZVR/NVR NEXTGEN via Onvif
- IP66
- Surge protection
- 3AXIS bracket
- PoE supported

ACCESSORIES



HYU-355
Connection base

Dimensions

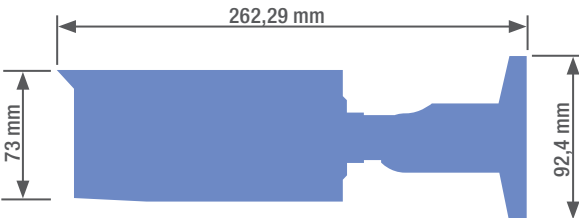

CAMERA	
Image sensor	1/3 CMOS, 4 MP
Effective pixels	2688(H) x 1520(V)
Frames per second	PAL/NTSC: 25 fps @4MP (2592x1520)
Electronic shutter	Auto, 1/25s ~ 1/100.000s
IR illumination	15 led array: 30 ~ 40 meters
Minimum illumination	0,01 lux F1,2 (AGC ON) / 0 lux IR ON
LENS	
Lens	2,7 ~ 13,5 mm
Lens type	Motorized
Focus mode	Auto
FUNCTIONS	
Day/night	Auto, Color, B/W, synchronized
OSD menu	Supported
White balance	Auto, indoor, outdoor
Gain control	AGC
Backlight compensation	BLC, WDR digital
Noise reduction	2D/3D-DNR
Mirror	Supported
Motion detection	Supported
Privacy mask	Supported
ELECTRICAL AND ENVIRONMENTAL	
Power supply	12V DC (±10%) /670 mA
Consumption	<8W
Working temperature	-30°C ~ +60°C
RH	10% ~ 90% HR
Protection	IP66
PHYSICAL FEATURES	
Case	Metal
Dimensions	262,3 x 75 x 73 mm