


CODE: **AWO454** v1.0/II  
 NAME: **EXPANDER2/SP/GRADE 3**

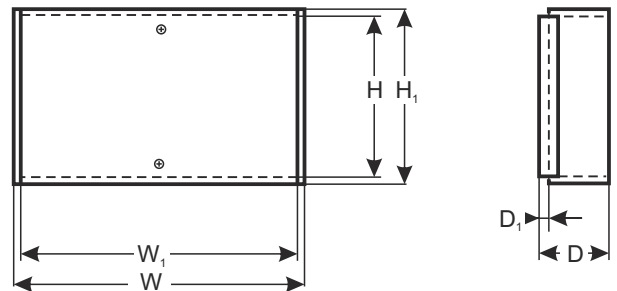

## DESTINATION

### SATEL:

- 1) 3x ( CA10E, CA64E, SM, MST1)
- 2) 2x CA64 ( EPS, O-OC, O-ROC, O-R, VGM-16, SR, ADR, ACC-KP, PS)+ CA10E ( MST1)
- 3) CA64 ( EPS, ADR, O-R, O-ROC, O-OC, VGM-16, SR, ACC- KP- PS)+ 2x ( CA10E, CA64E, SM, MST1)
- 4) CA64 ( PP, OPS- OC, OPS-R, OPS-ROC) + CA64 ( EPS, ADR, O-R, O-ROC, O-OC, VGM16, SR, ACC-KP-PS)
- 5) CA64 PTSA

### DSC:

- 1)4x ( 4108, 5108, 6108, 5208, 5100, 4116)
- 2)( 4108, 5108, 6108, 5208, 5100, 4116)+ ( 4216, 4580, 5400, 5580)
- 3)1x ( 4216, 4580, 5400, 5580)

### PARADOX:

- 1)3x ( ZX4, ZX8, ZX8SP, HUB2, PGM4)
- 2)ADM2+ 2x ( ZX4, ZX8, ZX8SP, HUB2, PGM4)

### RISCO:

- 1)2x ( EZ8, EZ16, E04, E08)

## TECHNICAL DATA

External dimensions of the enclosure:	W=297, H=203, D=67 D <sub>1</sub> =16 [+/- 2mm]
External dimensions of the front panel:	W <sub>1</sub> =292, H <sub>1</sub> =207 [+/- 2mm]
Weight netto/brutto:	1,62kg / 1,70kg [+/-0,1kg]
Operating conditions:	II environmental class, -10°C+40°C
Operating environment:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	2 x microswitch: opening casing and detachment from the wall 0,5A@50V/DC max. NC- contacts
Closing:	screwed x 2
Notes:	distance from wall (mounting surface) - 15mm
Declaration, warranty:	RoHS, CLC/TS 50131-1 Grade 3, 2 year from the production date