


v1.0/II

IP68



Rys.1

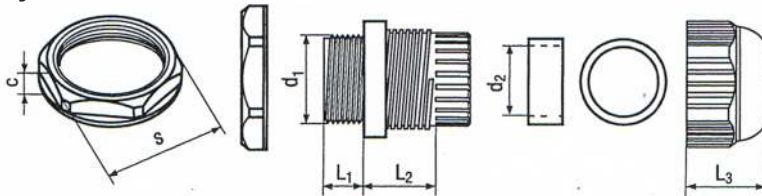

Tab.1

Code	Name	Ø cables	L ₁	L ₂	L ₃	d ₁	d ₂	c	s	Protection level
ML 146	Cable glands M12x1,25	3-6,5	8	13	13,5	12	7,5	4,5	18	IP68
ML147	Cable glands M16x1,5	4-8	8	14,5	15,6	16	9	5,1	22	IP68
ML145	Cable glands M20x1,5	6-12	8	17	18,5	20	12	6,1	26	IP68

APPLICATION

Glands are used to lead cables inside casing. They protect cables from being cut with sharp boards of casing hole. Moreover they protect devices inside the casing from humidity, water, dust and pollution.

TECHNICAL DATA

Dimensions:	Tab1.
Operating environment:	class II, -30°C+ 80°C
Material description:	ABS , IP68, color 7035
Destination:	outdoor / indoor
Certification, declaration:	RoHS, 2 year from the production date